


Bevel Gear Box

Our **Bevel Gear Box** is fully enclosed in an epoxy-coated steel housing sealed with hard-set rubber gasket for prolonged submersion.

To accommodate greater axial loading due to the weight of rigid reach rod above, the input shaft of our **Bevel Gear Box** extends well beyond the intersection of the two bevel gears, such that it can be firmly supported on

both ends by roller and thrust bearings for ease of operation and longer life cycle.

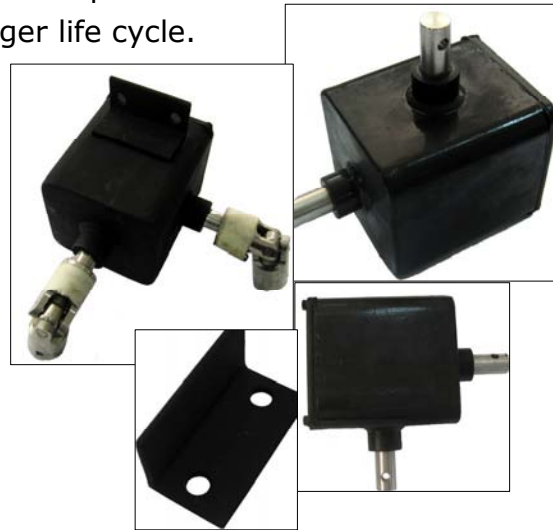

Worm Gear Box



Our **Worm Gear Box** is fully enclosed in a powder-coated cast iron housing sealed with lip seal and hard-set rubber gasket for prolonged submersion.

The use of high-performance axial needle bearings and grease helps maximize torque output for rugged applications.

TASARO SINGAPORE PTE LTD

1 Bukit Batok Crescent, #03-55 WCEGA Plaza, Singapore 658064

Phone: +65 6570 8284 | Fax: +65 6570 8286 | E-mail: info@tasaro.com

TBC2011-V1-B06